


TT30PI

CODE: TAGLTT30PI
CUTTING

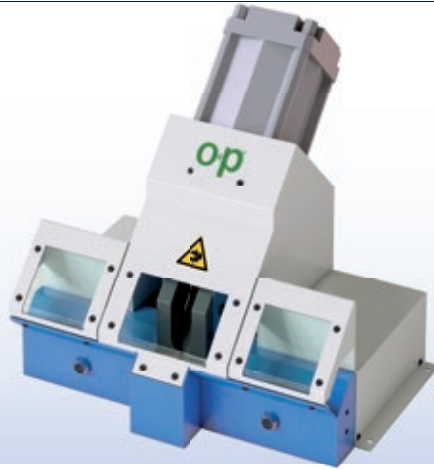

IDEAL FOR LOW PRESSURE
AND TEXTILE HOSES UP TO 5/8"

MAIN FEATURES



PNEUMATIC INPUT




SAFETY PROTECTIONS

TECHNICAL DATA

| | TT30PI |
|------------------|--------------------|
| MAX Ø | 1,1" |
| DIMENSIONS LXWXH | 17.3"X 18.3"X16.9" |
| WEIGHT | 66 Lbs |

ACCESSORIES

| | TT30PI |
|-----------------------|---|
| PEDAL |  ■ |
| MEASURING HOSE HOLDER | ■ |

CUTTING BLADES

CUTTING

TECHNICAL DATA

Dimensions - Dimensioni (EXT Ø x W x INT. Ø)

SMOOTH AND TOOTHED CUTTING BLADES*

Ø 200 X 2,5 X 32

Ø 250 X 3 X 40 (TF2, TF2/E, TF1/E)

Ø 275 X 3 X 40

Ø 300 X 3 X 50

Ø 350 X 3 X 50 (TF3/E)

Ø 400 X 4 X 50 (TF4, TF4/E, TF3, TF3 PI)

Ø 520 X 4 X 50 (TUBOCUT5, TF5, TF5 DI)

Ø 650 X 6 X 80 (TF6)

*SMOOTH BLADES AVAILABLE UPON REQUEST



DIAMOND BLADE

DIAMOND BLADES

DIAMOND BLADES FOR SPECIAL APPLICATIONS.
AVAILABLE Ø: 200, 250, 275, 300, 350, 400, 520, 650 mm.
THEY ARE IDEAL FOR CUTTING STEEL SPIRAL HOSES TYPE SAE 100R4, THAT ARE HARDWALL SMOOTH RUBBER HOSES SUITABLE FOR SUCTION AND DELIVERY OF HYDRAULIC FLUIDS, MINERAL OIL AND FUELS.
THEY CAN BE ALSO USED FOR CUTTING REINFORCED HOSES WITH A SINGLE STEEL WIRE SPIRAL WITH HIGH STRENGTH SYNTHETIC TEXTILE PLIES.